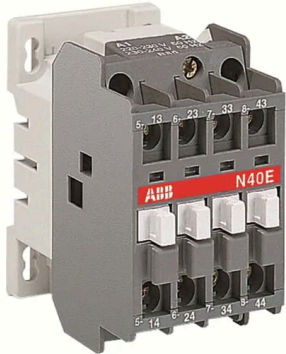


Genuine products

Dedicated  
Support

Doorstep Delivery

eMart[Home](#) > [Electrification](#) > [Automation & Control](#) > [Contactors](#) > [Contactors < 100A](#) > N40E 220-230V 50Hz / 230-240V 60Hz Contactor Relay♥ [ADD TO WISH LIST](#)

Share with your friends



Automation &amp; Control

## N40E 220-230V 50Hz / 230-240V 60Hz Contactor Relay

**₹511.56** + ₹92.08 (GST 18%)

- 1 +

Buy Now

Add to Cart

More Offers available from [15 sellers](#) starting at  
INR. 603.64

Pin Code

[Calculate Shipping](#)

Please enter your PIN Code to check the best offers

Product Id#: 1SBH141001R8040

[Be the first to review this product](#)Sold and delivered by **Pankaj Electricals**

N... contactor relays are used for switching auxiliary circuits and control circuits - Poles: 4-pole contactor relays (mechanically linked contact elements available) - Control circuit: AC operated with laminated magnet circuit - Accessories: a wide range of accessories is available.

Enquire Now

More about N40E 220-230V 50Hz / 230-240V 60Hz Contactor Relay

[Technical Specification](#)

MRP (Indian Rupees)	Not for Retail Sale
Compatibility	Auxiliary Contactors
Max Mechanical Switching Frequency	6000 cycles per hour
Conventional Free-air Thermal Current (Ith)	acc. to IEC 60947-5-1, q = 40 °C 16 ampere
Coil Consumption	Holding at Max. Rated Control Circuit Voltage 50 Hz 8 2 volt - ampere, Holding at Max. Rated Control Circuit Voltage 60 Hz 8 2 volt - ampere, Pull-in at Max. Rated Control Circuit Voltage 50 Hz 70 volt - ampere, Pull-in at Max. Rated Control Circuit Volta
Terminal Type	Screw Terminals
Rated Operational Voltage	Main Circuit 690 volt
Operate Time	Between Coil De-energization and NO Contact Opening 4 ... 11 millisecond, Between Coil Energization and NO Contact Closing 10 ... 26 millisecond
Rated Control Circuit Voltage (Uc)	50 Hz 220-230V; 60 Hz 230-240V
Rated Operational Current DC-13 (Ie)	(125 V) 0.55 / 69 ampere, (24 V) 6 / 144 ampere, (250 V) 0.3 / 75 ampere, (48 V) 2.8 / 134 ampere, (72 V) 1 / 72 ampere
Rated Operational Current AC-15 (Ie)	(220 / 240 V) 4 ampere, (24 / 127 V) 6 ampere, (380 / 440 V) 3 ampere, (500 V) 2 ampere, (690 V) 2 ampere
Rated Breaking Capacity acc. to IEC 60947-5-1	10 x Ie AC-15
Rated Frequency Limits	25 ... 400 hertz
Rated Frequency (f)	Supply Circuit 50 60 hertz
Number of Aux Contacts NO	4
Package Width	78 millimetre
Package Length	79 millimetre
Package Height	47 millimetre
Invoice Description	N40E 220-230V 50Hz / 230-240V 60Hz Contactor Relay
Product Range	Auxiliary Contactors
Package Gross Weight	0.34 kilogram
Extended Product Type	N40E 220-230V 50Hz / 230-240V 60Hz
Ambient Air Temperature	Close to Contactor for Storage -60 ... +80 degree Celsius, Near Contactor for Operation in Free Air (Uc) -40 ... +70 degree Celsius, Near Contactor for Operation in Free Air (0.85 ... 1.1 Uc) -40 ... +55 degree Celsius
Rated Insulation Voltage (Ui)	acc. to UL/CSA 600 volt, acc. to IEC 60947-5-1 and VDE 0110 (Gr. C) 690 volt
Product Class	Block Contactors

Enquire Now

Total GST Percentage	18.00
HSN Number	85364900
Country of origin	Bulgaria (BG) - Imported by ABB India Limited

Download

Offers

Reviews

Recently Viewed

 <p><u>N40E 400-415V 50Hz / 415-440V 60Hz Contactor Relay.</u> 1SBH141001R8640 ₹763.22</p>	 <p><u>NL22E 24V DC Contactor Relay.</u> 1SBH143001R8122 ₹1,000.76</p>	 <p><u>NL22E 48V DC Contactor Relay.</u> 1SBH143001R8322 ₹1,086.19</p>	 <p><u>NL22E 110V DC Contactor Rel</u> 1SBH143001R8622 ₹920.03</p>
---	---	--	---

☐ Write to Us

1800 420 0707

@ [contactabb.in@abb.com](mailto:contactabb.in@abb.com)  
(Only for India Inquiries)

Disha - Plot No.5 & 6, 2nd Stage, Peenya  
Industrial Area IV, Peenya 560058,  
Bangalore, Karnataka, India.

 [Facebook](#)  [Twitter](#)  
 [Linkedin](#)  [Youtube](#)

COMPANY

INFORMATION

PAYMENT METHODS

About Us   Sell With Us   Our Sellers   Blogs   Exchange and Returns Policy   Privacy Policy   Terms of Use   How to create a Company Account   FAQ

Enquire Now

