


[Home](#) > [Electrification](#) > [Automation & Control](#) > [Contactors](#) > [Contactors < 100A](#) > N40E 400-415V 50Hz / 415-440V 60Hz Contactor Relay



♥ [ADD TO WISH LIST](#)

Share with your friends

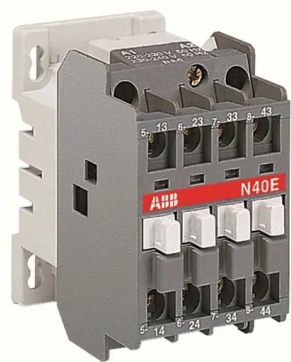

Automation & Control

Genuine products

Dedicated Support

Doorstep Delivery

ABB

eMart

N40E 400-415V 50Hz / 415-440V 60Hz Contactor Relay

₹646.80

+ ₹116.42 (GST 18%)

-

1

+

Buy Now

Add to Cart

More Offers available from [3 sellers](#) starting at INR. 763.22

Pin Code

Calculate Shipping

Please enter your PIN Code to check the best offers

Product Id#: 1SBH141001R8640

[Be the first to review this product](#)

Sold and delivered by **Suman Electric Udyogs P Ltd**

N... contactor relays are used for switching auxiliary circuits and control circuits - Poles: 4-pole contactor relays (mechanically linked contact elements available) - Control circuit: AC operated with laminated magnet circuit - Accessories: a wide range of accessories is available.

More about N40E 400-415V 50Hz / 415-440V 60Hz Contactor Relay

[Technical Specification](#)

Enquire Now

https://shop.in.abb.com/1sbh141001r8640/n40e-400-415v-50hz-415-440v-60hz-contactor-relay.html?srsId=AfmBOoqltROL8dxv3-uUfzGGpSoufv7ab... 1/3

MRP (Indian Rupees)	Not for Retail Sale
Compatibility	Auxiliary Contactors
Max Mechanical Switching Frequency	6000 cycles per hour
Conventional Free-air Thermal Current (Ith)	acc. to IEC 60947-5-1, q = 40 °C 16 ampere
Coil Consumption	Holding at Max. Rated Control Circuit Voltage 50 Hz 8 2 volt - ampere, Holding at Max. Rated Control Circuit Voltage 60 Hz 8 2 volt - ampere, Pull-in at Max. Rated Control Circuit Voltage 50 Hz 70 volt - ampere, Pull-in at Max. Rated Control Circuit Volta
Terminal Type	Screw Terminals
Rated Operational Voltage	Main Circuit 690 volt
Operate Time	Between Coil De-energization and NO Contact Opening 4 ... 11 millisecond, Between Coil Energization and NO Contact Closing 10 ... 26 millisecond
Rated Control Circuit Voltage (Uc)	50 Hz 400-415V; 60 Hz 415-440V
Rated Operational Current DC-13 (Ie)	(125 V) 0.55 / 69 ampere, (24 V) 6 / 144 ampere, (250 V) 0.3 / 75 ampere, (48 V) 2.8 / 134 ampere, (72 V) 1 / 72 ampere
Rated Operational Current AC-15 (Ie)	(220 / 240 V) 4 ampere, (24 / 127 V) 6 ampere, (380 / 440 V) 3 ampere, (500 V) 2 ampere, (690 V) 2 ampere
Rated Breaking Capacity acc. to IEC 60947-5-1	10 x Ie AC-15
Rated Frequency Limits	25 ... 400 hertz
Rated Frequency (f)	Supply Circuit 50 60 hertz
Number of Aux Contacts NO	4
Package Width	78 millimetre
Package Length	79 millimetre
Package Height	47 millimetre
Invoice Description	N40E 400-415V 50Hz / 415-440V 60Hz Contactor Relay
Product Range	Auxiliary Contactors
Package Gross Weight	0.34 kilogram
Extended Product Type	N40E 400-415V 50Hz / 415-440V 60Hz
Ambient Air Temperature	Close to Contactor for Storage -60 ... +80 degree Celsius, Near Contactor for Operation in Free Air (Uc) -40 ... +70 degree Celsius, Near Contactor for Operation in Free Air (0.85 ... 1.1 Uc) -40 ... +55 degree Celsius
Rated Insulation Voltage (Ui)	acc. to UL/CSA 600 volt, acc. to IEC 60947-5-1 and VDE 0110 (Gr. C) 690 volt
Product Class	Block Contactors

Enquire Now

Reviews

Enquire Now