


[Home](#) > [Electrification](#) > [Automation & Control](#) > [Contactors](#) > [Contactors < 100A](#) > TAL30-30-10 77-143V DC Contactor



Share with your friends

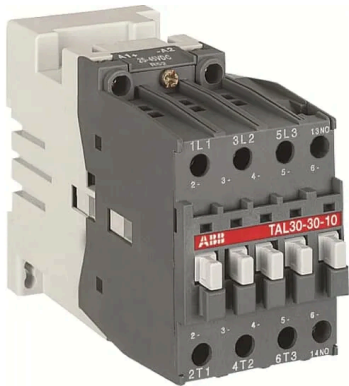

Genuine products

Dedicated Support

Doorstep Delivery

eMart

Automation & Control

TAL30-30-10 77-143V DC Contactor

Out of stock

Upon Request

Product Id#: 1SBL283061R6210

[Be the first to review this product](#)

TAL30 contactors are mainly used for controlling 3-phase motors and generally for controlling power circuits up to 690 V AC or 220 V DC. The contactors can also be used for many other applications such as isolation, capacitor switching, lighting. The TAL... series 1-stack 3-pole contactors are of the block type design. - Main poles and auxiliary contact blocks: 3 main poles, 1 built-in auxiliary contact, front and side-mounted add-on auxiliary contact blocks - Control circuit: DC operated with solid core magnet circuit. The polarity on the coil terminals (A1+ and A2-) must be respected - Accessories: a wide range of accessories is available. TAL... contactors are fitted with low consumption DC coils and offer a large coil voltage range.

Enquire Now

More about TAL30-30-10 77-143V DC Contactor

Technical Specification

MRP (Indian Rupees)

Not for Retail Sale

Compatibility

TAL Contactors

Max Mechanical Switching Frequency

3600 cycles per hour

Max Electrical Switching Frequency	AC-1 600 cycles per hour, AC-2 / AC-4 300 cycles per hour, AC-3 1200 cycles per hour
Conventional Free-air Thermal Current (Ith)	acc. to IEC 60947-5-1, q = 40 °C 16 ampere, acc. to IEC 60947-4-1, Open Contactors q = 40 °C 65 ampere
Coil Consumption	Holding DC (Umin / Umax) 2.7 / 9 watt, Pull-in DC (Umin / Umax) 2.7 / 9 watt
Terminal Type	Screw Terminals
Rated Operational Voltage	Auxiliary Circuit 690 volt, Main Circuit 690 volt
Operate Time	Between Coil De-energization and NO Contact Opening 12 ... 18 millisecond, Between Coil Energization and NO Contact Closing 55 ... 110 millisecond
Rated Control Circuit Voltage (Uc)	DC Operation 77-143V
Rated Breaking Capacity AC-3 acc. to IEC 60947-4-1	8 x Ie AC-3
Rated Operational Power AC-3 (Pe)	(220 / 230 / 240 V) 9 KWT, (380 / 400 V) 15 KWT, (415 V) 15 KWT, (440 V) 18.5 KWT, (500 V) 18.5 KWT, (690 V) 15 KWT
Rated Operational Current DC-13 (Ie)	(125 V) 1.1 / 138 ampere, (24 V) 6 A / 144 watt, (250 V) 0.55 / 138 ampere, (48 V) 2.8 A / 134 watt, (72 V) 2 / 144 ampere
Rated Operational Current AC-3 (Ie)	(220 / 230 / 240 V) 55 °C 33 ampere, (380 / 400 V) 55 °C 32 ampere, (415 V) 55 °C 32 ampere, (440 V) 55 °C 32 ampere, (500 V) 55 °C 28 ampere, (690 V) 55 °C 18 ampere
Rated Operational Current AC-15 (Ie)	(220 / 240 V) 4 ampere, (24 / 127 V) 6 ampere, (380 / 440 V) 3 ampere, (500 V) 2 ampere, (690 V) 2 ampere
Rated Operational Current AC-1 (Ie)	(690 V) 40 °C 55 ampere, (690 V) 55 °C 55 ampere, (690 V) 70 °C 39 ampere
Rated Making Capacity AC-3 acc. to IEC 60947-4-1	10 x Ie AC-3
Rated Frequency Limits	25 ... 400 hertz
Rated Frequency (f)	Supply Circuit 50 60 hertz
Number of Aux Contacts NO	1
Package Width	100 millimetre
Package Length	134 millimetre
Package Height	62 millimetre
Invoice Description	TAL30-30-10 77-143V DC Contactor
Product Range	TAL Contactors
Package Gross Weight	0.85 kilogram
Extended Product Type	TAL30-30-10 77-143V DC

Enquire Now



Ambient Air Temperature	Close to Contactor for Storage -60 ... +80 degree Celsius, Close to Contactor without Thermal O/L Relay -40 ... +55 degree Celsius, Close to Contactor Fitted with Thermal O/L Relay -25 ... +55 degree Celsius
Rated Insulation Voltage (Ui)	acc. to UL/CSA 600 volt, acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 1000 volt
Product Class	Block Contactors
Total GST Percentage	18.00
HSN Number	85364900
Country of origin	Bulgaria (BG) - Imported by ABB India Limited

[Download](#)

[Reviews](#)

Recently Viewed

 <p><u>TAL40-30-10 77-143V DC Contactor</u> 1SBL323061R6210 ₹4,383.68</p>	 <p><u>A16-30-10 400-415V 50Hz / 415-440V 60Hz Contactor</u> 1SBL181001R8610 ₹859.00</p>	 <p><u>A16-30-10 24V 50Hz / 24V 60Hz Contactor</u> 1SBL181001R8110 ₹892.08</p>	 <p><u>A16-30-10 110V 50Hz / 110-120V 60Hz Contactor</u> 1SBL181001R8410 ₹813.85</p>
---	--	---	--

Enquire Now

☐ Write to Us

1800 420 0707

@ contactabb.in@abb.com

(Only for India Inquiries)

Disha - Plot No.5 & 6, 2nd Stage, Peenya Industrial Area IV, Peenya 560058, Bangalore, Karnataka, India.

Facebook

Twitter

LinkedIn

Youtube

COMPANY

Us

Our With Sellers Us

INFORMATION

BlogsWith Sellers Us

Exchange and Returns Policy

Privacy Policy

Terms of Use

How to create a Company Account

FAQ

PAYMENT METHODS

