


PRODUCT-DETAILS

# AF305-30-11-12

## AF305-30-11-12 Contactor

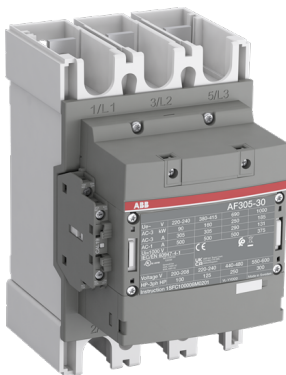

| General Information   |   |
|-----------------------|---|
| Extended Product Type | AF305-30-11-12  |
| Product ID            | 1SFL587002R1211   |
| EAN                   | 7320500481745   |
| Catalog Description   | AF305-30-11-12 Contactor  |
| Long Description      | <p>The AF305-30-11-12 is a 3 pole - 1000 V IEC or 600 V UL contactor with pre-mounted auxiliary contacts and Main Circuit Bars, controlling motors up to 160 kW / 400 V AC (AC-3) or 250 hp / 480 V UL and switching power circuits up to 500 A (AC-1) or 400 A UL general use. Thanks to the AF technology, the contactor has a wide control voltage range (48-130 V 50/60 Hz and DC), managing large control voltage variations, reducing panel energy consumptions and ensuring distinct operations in unstable networks. Furthermore, surge protection is built-in, offering a compact solution. AF contactors have a block type design, can be easily extended with add-on auxiliary contact blocks and an additional wide range of accessories.</p> |

| Ordering               |          |
|------------------------|----------|
| Minimum Order Quantity | 1 piece  |
| Customs Tariff Number  | 85364900 |

| Popular Downloads     |                 |
|-----------------------|-----------------|
| Data Sheet, Technical | 1SBC100192C0206 |

## Information

|                          |                 |
|--------------------------|-----------------|
| Instructions and Manuals | 1SFC100008M0201 |
| CAD Dimensional Drawing  | 2CDC001079B0201 |
| Dimension Diagram        | 1SFB535001G1060 |

## Dimensions

|                            |        |
|----------------------------|--------|
| Product Net Width          | 140 mm |
| Product Net Depth / Length | 180 mm |
| Product Net Height         | 225 mm |
| Product Net Weight         | 3.9 kg |

## Technical

|   |   |
|---|---|
| Number of Main Contacts NO                                  | 3   |
| Number of Main Contacts NC                                  | 0   |
| Number of Auxiliary Contacts NO                             | 1   |
| Number of Auxiliary Contacts NC                             | 1   |
| Rated Operational Voltage                                   | Main Circuit 1000 V   |
| Rated Frequency (f)   | Main Circuit 50 / 60 Hz   |
| Conventional Free-air Thermal Current ( $I_{th}$ )          | acc. to IEC 60947-4-1, Open Contactors $\Theta = 40\text{ °C}$ 500 A  |
| Rated Operational Current AC-1 ( $I_e$ )                    | (1000 V) 40 °C 375 A<br>(1000 V) 55 °C 325 A<br>(1000 V) 60 °C 325 A<br>(1000 V) 70 °C 260 A<br>(690 V) 40 °C 500 A<br>(690 V) 55 °C 400 A<br>(690 V) 70 °C 325 A   |
| Rated Operational Current AC-3 ( $I_e$ )                    | (415 V) 55 °C 305 A<br>(440 V) 55 °C 305 A<br>(500 V) 55 °C 290 A<br>(690 V) 55 °C 290 A<br>(1000 V) 55 °C 131 A<br>(380 / 400 V) 55 °C 305 A<br>(220 / 230 / 240 V) 55 °C 305 A  |
| Rated Operational Power AC-3 ( $P_e$ )                      | (415 V) 160 kW<br>(440 V) 160 kW<br>(500 V) 200 kW<br>(690 V) 250 kW<br>(1000 V) 185 kW<br>(380 / 400 V) 160 kW<br>(220 / 230 / 240 V) 90 kW  |
| Rated Breaking Capacity AC-3                                | 8 x $I_e$ AC-3  |
| Rated Making Capacity AC-3                                  | 10 x $I_e$ AC-3   |
| Short-Circuit Protective Devices                            | gG Type Fuses 500 A   |
| Rated Short-time Withstand Current Low Voltage ( $I_{cw}$ ) | at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 2440 A<br>at 40 °C Ambient Temp, in Free Air, from a Cold State 15 min 500 A<br>at 40 °C Ambient Temp, in Free Air, from a Cold State 1 min 996 A<br>at 40 °C Ambient Temp, in Free Air, from a Cold State 1 s 3050 A<br>at 40 °C Ambient Temp, in Free Air, from a Cold State 30 s 1409 A |
| Maximum Breaking Capacity                                   | cos phi=0.45 (cos phi=0.35 for $I_e > 100\text{ A}$ ) at 440 V 4600 A<br>cos phi=0.45 (cos phi=0.35 for $I_e > 100\text{ A}$ ) at 690 V 3800 A  |

|   |  |
|---|--|
| Maximum Electrical Switching Frequency        | (AC-1) 300 cycles per hour<br>(AC-2 / AC-4) 150 cycles per hour<br>(AC-3) 300 cycles per hour  |
| Rated Operational Current DC-1 ( $I_e$ )      | (110 V) 1-Pole, 40 °C 500 A<br>(220 V) 2 Poles in Series, 40 °C 500 A<br>(220 V) 3 Poles in Series, 40 °C 500 A  |
| Rated Operational Current DC-3 ( $I_e$ )      | (110 V) 2 Poles in Series, 40 °C 400 A<br>(220 V) 3 Poles in Series, 40 °C 400 A   |
| Rated Operational Current DC-5 ( $I_e$ )      | (110 V) 2 Poles in Series, 40 °C 400 A<br>(220 V) 3 Poles in Series, 40 °C 400 A   |
| Rated Insulation Voltage ( $U_i$ )            | acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 1000 V<br>acc. to UL/CSA 600 V  |
| Rated Impulse Withstand Voltage ( $U_{imp}$ ) | Main Circuit 8 kV  |
| Mechanical Durability                         | 5 million  |
| Maximum Mechanical Switching Frequency        | 300 cycles per hour  |
| Coil Operating Limits                         | (acc. to IEC 60947-4-1) 0.85 x $U_c$ Min. ... 1.1 x $U_c$ Max. (at $\theta \leq 70$ °C)  |
| Rated Control Circuit Voltage ( $U_c$ )       | 50 Hz 48 ... 130 V<br>60 Hz 48 ... 130 V<br>DC Operation 48 ... 130 V  |
| Coil Consumption                              | Holding at Max. Rated Control Circuit Voltage 50 Hz 17 V·A<br>Holding at Max. Rated Control Circuit Voltage 60 Hz 17 V·A<br>Holding at Max. Rated Control Circuit Voltage DC 2.5 W<br>Pull-in at Max. Rated Control Circuit Voltage 50 Hz 340 V·A<br>Pull-in at Max. Rated Control Circuit Voltage 60 Hz 340 V·A<br>Pull-in at Max. Rated Control Circuit Voltage DC 360 W |
| Operate Time                                  | Between Coil De-energization and NO Contact Opening 37 ... 47 ms<br>Between Coil Energization and NO Contact Closing 25 ... 55 ms  |
| Connecting Capacity Main Circuit              | Flexible 2 x 70 ... 185 mm <sup>2</sup><br>Rigid Al-Cable 1 x 185 ... 240 mm <sup>2</sup><br>Rigid Cu-Cable 2 x 70 ... 185 mm <sup>2</sup>   |
| Connecting Capacity Auxiliary Circuit         | Flexible with Ferrule 2x 0.75 ... 2.5 mm <sup>2</sup><br>Flexible with Insulated Ferrule 2x 0.75 ... 2.5 mm <sup>2</sup><br>Flexible 1x0.75 ... 2.5 mm <sup>2</sup><br>Solid 2 x 1 ... 4 mm <sup>2</sup><br>Stranded 2 x 1 ... 4 mm <sup>2</sup>   |
| Degree of Protection                          | acc. to IEC 60529, IEC 60947-1, EN 60529 Coil Terminals IP20<br>acc. to IEC 60529, IEC 60947-1, EN 60529 Main Terminals IP00   |
| Terminal Type                                 | Main Circuit: Bars   |

## Technical UL/CSA

|                                  |   |
|----------------------------------|---|
| Maximum Operating Voltage UL/CSA | Main Circuit 1000 V   |
| General Use Rating UL/CSA        | (600 V AC) 400 A  |
| Horsepower Rating UL/CSA         | (200 V AC) Three Phase 100 hp<br>(208 V AC) Three Phase 100 hp<br>(220 ... 240 V AC) Three Phase 125 hp<br>(440 ... 480 V AC) Three Phase 250 hp<br>(550 ... 600 V AC) Three Phase 300 hp |

## Environmental

|  |  |
|--|--|
| Ambient Air Temperature                | Close to Contactor Fitted with Thermal O/L Relay (0.85 ... 1.1 $U_c$ ) -25 ... 50 °C<br>Close to Contactor without Thermal O/L Relay (0.85 ... 1.1 $U_c$ ) -40 ... 70 °C<br>Close to Contactor for Storage -40 ... 70 °C |
| Maximum Operating Altitude Permissible | Without Derating 3000 m  |

## Material Compliance

|   |  |
|---|--|
| Conflict Minerals Reporting Template (CMRT) | 9AKK108467A5658  |
| REACH Declaration                           | 2CMT2021-006202  |
| RoHS Information                            | 2CMT2021-006277  |
| RoHS Status                                 | Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019 |
| Toxic Substances Control Act - TSCA         | 2CMT2023-006525  |
| WEEE B2C / B2B                              | Business To Business   |
| WEEE Category                               | 5. Small Equipment (No External Dimension More Than 50 cm)             |

## Circular Value

|   |  |
|---|--|
| ABB EcoSolutions                              | Yes  |
| Circular Design Principles Recyclability Rate | Design for Closing Resource Loops - Standard EN45555 - 76.3 %  |
| End of Life Instructions                      | 1SFC100104D0201  |
| Group Waste to Landfill Target                | Non-hazardous waste is sent to a landfill, where there is no alternative option available within 100km of a facility                     |
| Improved Resource Efficiency for Customers    | Product Efficiency - Product considered more energy-efficient compared to similar product on market or older products from the same line |
| Sustainable Material Content                  | Recycled Metal - 33 %  |

## Eco Transparency

|   |                 |
|---|-----------------|
| Environmental Product Declaration - EPD | 1SFC100104D0201 |
|---|-----------------|

## Certificates and Declarations

|                                  |  |
|----------------------------------|--|
| ABS Certificate                  | 14-LD1092198-PDA                           |
| BV Certificate                   | BV_36353_A0BV                              |
| CB Certificate                   | SE-89316                                   |
| CCS Certificate                  | GB14T00030                                 |
| CQC Certificate                  | CQC2014010304676670<br>CQC2014010304673866 |
| Declaration of Conformity - CCC  | 2020980304001305<br>2020980304001068       |
| Declaration of Conformity - CE   | 2CMT2015-005439                            |
| Declaration of Conformity - UKCA | 2CMT2020-006118                            |
| DNV Certificate                  | DNV_E-14043                                |
| EAC Certificate                  | 9AKK107046A8618                            |
| GL Certificate                   | GL_95073-14HH                              |
| LR Certificate                   | LR_14_70011(E1)                            |
| PRS Certificate                  | TE_2092_880423_16                          |
| RINA Certificate                 | ELE060313XG_002                            |
| RMRS Certificate                 | 9AKK107045A6978                            |
| UL Certificate                   | 20121217-E36588                            |

Container Information

|                                |               |
|--------------------------------|---------------|
| Package Level 1 Units          | box 1 piece   |
| Package Level 1 Width          | 263 mm        |
| Package Level 1 Depth / Length | 203 mm        |
| Package Level 1 Height         | 289 mm        |
| Package Level 1 Gross Weight   | 4.6 kg        |
| Package Level 1 EAN            | 7320500481745 |

Classifications

|                                    |   |
|------------------------------------|---|
| Object Classification Code         | Q   |
| ETIM 4                             | EC000066 - Magnet contactor, AC-switching |
| ETIM 5                             | EC000066 - Magnet contactor, AC-switching |
| ETIM 6                             | EC000066 - Power contactor, AC switching  |
| ETIM 7                             | EC000066 - Power contactor, AC switching  |
| ETIM 8                             | EC000066 - Power contactor, AC switching  |
| eClass                             | V11.0 : 27371003                          |
| UNSPSC                             | 39121529                                  |
| IDEA Granular Category Code (IGCC) | 4758 >> lec Contactors                    |
| E-Number (Finland)                 | 3706483                                   |
| E-Number (Norway)                  | 4117652                                   |
| E-Number (Sweden)                  | 3210162                                   |

Categories

Low Voltage Products and Systems → Control Products → Contactors → Block Contactors → AF Contactors → AF305

