


# Product datasheet

Specifications

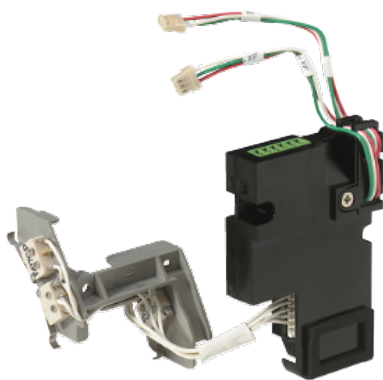

## auxiliary contact OF - 6 A - 1 NO/NC - for Masterpact NT

47076

### Main

Device short name	OF
Product or component type	Auxiliary contact
Device application	Connection
Range compatibility	Masterpact MasterPact NT circuit breaker
Signal contacts composition	1 NO/NC

### Complementary

Auxiliary contacts type	Standard
[Ith] conventional free air thermal current	6 A
[Ie] rated operational current	DC-12: 2.5 A at 24/48 V DC AC-12: 6 A at 24/48 V AC 50/60 Hz AC-12: 6 A at 240 V AC 50/60 Hz AC-12: 6 A at 380 V AC 50/60 Hz DC-12: 0.3 A at 250 V DC DC-12: 0.5 A at 125 V DC
Minimum load	100 mA at 24 V
Accessory / separate part category	Spare parts for MasterPact NT

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.000 cm
Package 1 Width	2.500 cm
Package 1 Length	10.500 cm
Package 1 Weight	21.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	30
Package 2 Height	12.500 cm
Package 2 Width	13.000 cm
Package 2 Length	19.000 cm
Package 2 Weight	735.000 g

Unit Type of Package 3	S03
Number of Units in Package 3	240
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	6.203 kg

Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	<a href="#">Yes</a>

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)