

Product datasheet

Specifications



Tower Light - RAG - 24V - LED - W.Buzzer - Base mounting

XVGB3SW

Discontinued on: 27 August 2020

Discontinued

Main

| | |
|------------------------------------|--|
| Range of product | Harmony XVG |
| Product or component type | Complete pre-wired monolithic tower light |
| Beacon or indicator bank unit type | 3 illuminated units |
| Material | PC (UL94 V-2): globe ABS (UL94HB): tube body Aluminium: tube |
| Mounting diameter | 60 mm |
| Component name | XVG |
| Device mounting | Base mounting |
| Light source | LED steady red LED steady green LED steady amber |
| Light block color | Red/orange/green |
| Indicator bank base type | Base with integrated buzzer |

Complementary


| | |
|--|-------------|
| Rated supply voltage | 24 V AC/DC |
| Cable cross section | 0.33 mm² |
| Discrete output type | PNP and NPN |
| [Uimp] rated impulse withstand voltage | 0.5 kV |
| Current consumption | 180 mA |
| Noise level | 85 dB |
| Power consumption in W | 4.1 W |
| Fundamental frequency | 2.64 kHz |
| Net weight | 0.25 kg |

Environment


| | |
|-------------------------------------|-------------|
| Product certifications | CE EAC |
| Ambient air temperature for storage | -35...70 °C |

| | |
|---------------------------------------|---|
| Ambient air temperature for operation | -10...50 °C |
| IP degree of protection | IP42 |
| Packing Units | |
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 7.926 cm |
| Package 1 Width | 8.002 cm |
| Package 1 Length | 31.039 cm |
| Package 1 Weight | 350.0 g |
| Unit Type of Package 2 | S04 |
| Number of Units in Package 2 | 21 |
| Package 2 Height | 30 cm |
| Package 2 Width | 40 cm |
| Package 2 Length | 60 cm |
| Package 2 Weight | 8.591 kg |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 84 |
| Package 3 Height | 75 cm |
| Package 3 Width | 60 cm |
| Package 3 Length | 80 cm |
| Package 3 Weight | 43 kg |
| Offer Sustainability | |
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |
| Contractual warranty | |
| Warranty | 18 months |


Dimensions

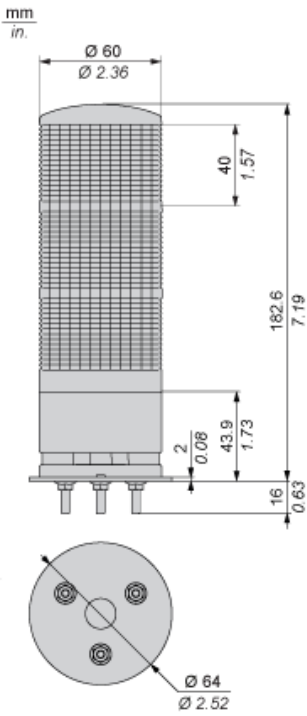

Mounting

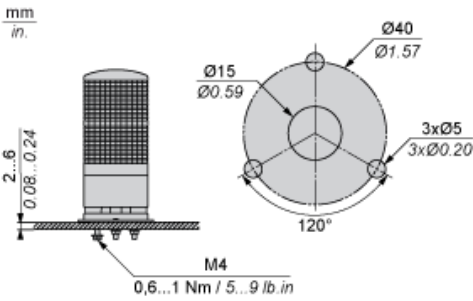

Wiring

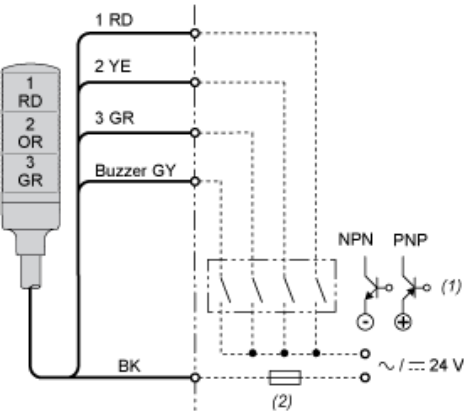

- (1)

“ON” for lighting and/or applying continuous sound.
- (2)

Fuse (rated current: 0.5 A)
- RD :

Red
- YE :

Yellow
- GR :

Green
- GY :

Grey
- OR :

Orange
- BK :

Black

Recommended replacement(s)