


**95234012SL**

## Remotely operated transfer switch ATyS r 4P 125A with bridging bars

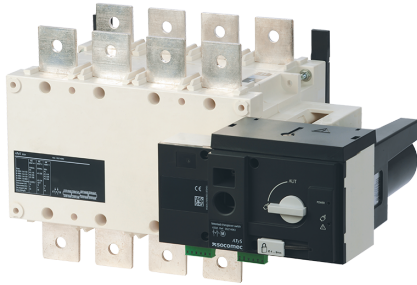

### Strong points

- Watchdog relay to check product availability
- Integrated auxiliary contacts
- Extended power supply range
- More robust

### General characteristics

- Range from 125A to 3200A.
- Available in 3P or 4P.
- Emergency manual operation handle.
- Top or bottom incoming sources.
- Extended power supply range 166-332VAC.
- Robust design.
- Includes bridging bars (up to 1600A).

### Compliance with standards

- IEC 60947-6-1

### Access to resources (ex: manuals)

ATyS r are 3 or 4 pole remotely operated motorised transfer switches with positive break indication. They enable the on-load transfer of two three-phase power supplies via remote volt-free contacts, from either an external automatic controller, using pulse logic, or a switch. They are intended for use in low voltage power systems where interruption of the load supply is acceptable during transfer.

### Classification

UNSPSC	39122205
ETIM Class	EC000216
IGCC	5177

### Commerce

Effective date	2017-10-12
Country of origin	IN

### ETIM - Electrical characteristics

Max. rated operation voltage Ue AC [V]	800
Rated operating voltage [V]	400..690
Rated permanent current Iu [A]	125
Rated permanent current at AC-23, 400 V [A]	125
Rated permanent current at AC-21, 400 V [A]	125
Rated short-time withstand current Icw [kA]	7
Rated operation power at AC-23, 400 V [kW]	63
Switching power at 400 V [kW]	1000
Conditioned rated short-circuit current Iq [kA]	100
Number of poles	4

### ETIM - Mechanical characteristics

Suitable for floor mounting	No
Suitable for front mounting 4-hole	No
Suitable for front mounting centre	No
Suitable for distribution board installation	No
Suitable for intermediate mounting	Yes
Colour control element	Other
Degree of protection (IP), front side	IP20

### ETIM - Technical features

Version as main switch	Yes
Version as maintenance-/service switch	Yes
Version as safety switch	Yes
Version as emergency stop installation	No
Version as reversing switch	Yes
Number of switches	2
Number of auxiliary contacts as normally open contact	3
Motor drive optional	No

Motor drive integrated	Yes
Voltage release optional	No
Device construction	Built-in device fixed built-in technique
Type of control element	Other
Interlockable	Yes
Type of electrical connection of main circuit	Bolt connection

### Logistics

GTIN/EAN	3596033029738
Customs number	8536508090
Price unit	PC
Weight of the packing unit	9

### Norms

Conformity to standards	IEC
-------------------------	-----

### Technical Characteristics

Control operator	RTSE
Number of poles	4
Rated current	125
Size	Class PC
Frame size	B3